


1.5L DRAGON BRONCO SPORT ENGINE COVER


Parts Needed:

- (1) JX6Z-6A949-B (Engine Cover)**
- (2) AA5Z 6N958-A (Ball Studs)**


The 3 red circled areas are your areas of interest.

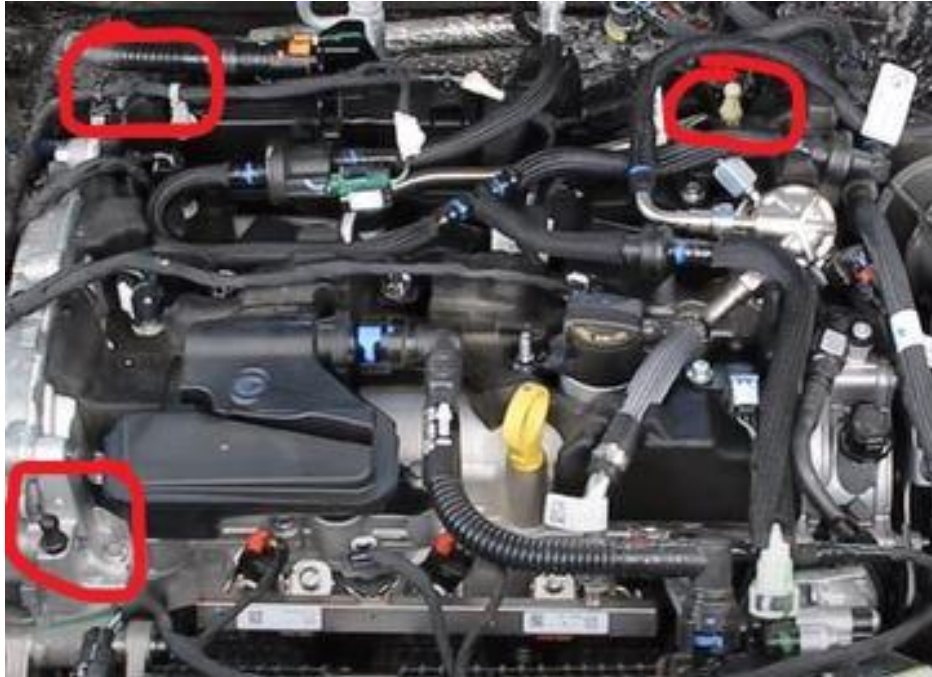


This is where your first of two ball studs (AA5Z 6N958-A) will go

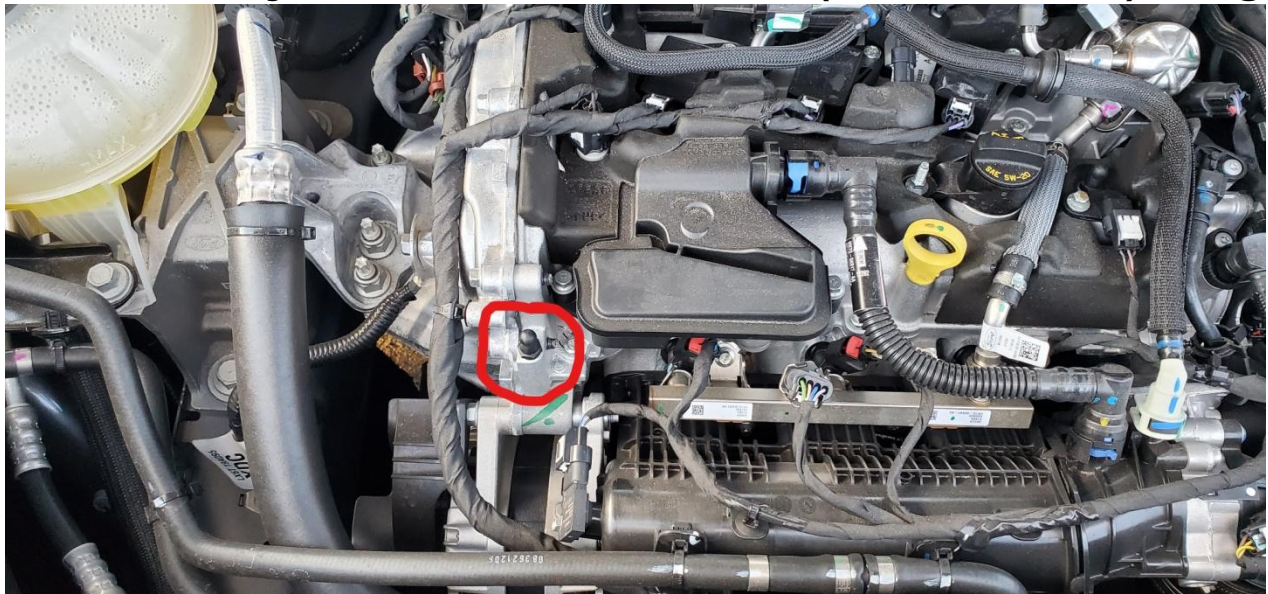

Going straight back towards the wall of your engine bay towards the Inside of your vehicle from the first ball stud installed is where your second ball stud (AA5Z 6N958-A) will be installed.

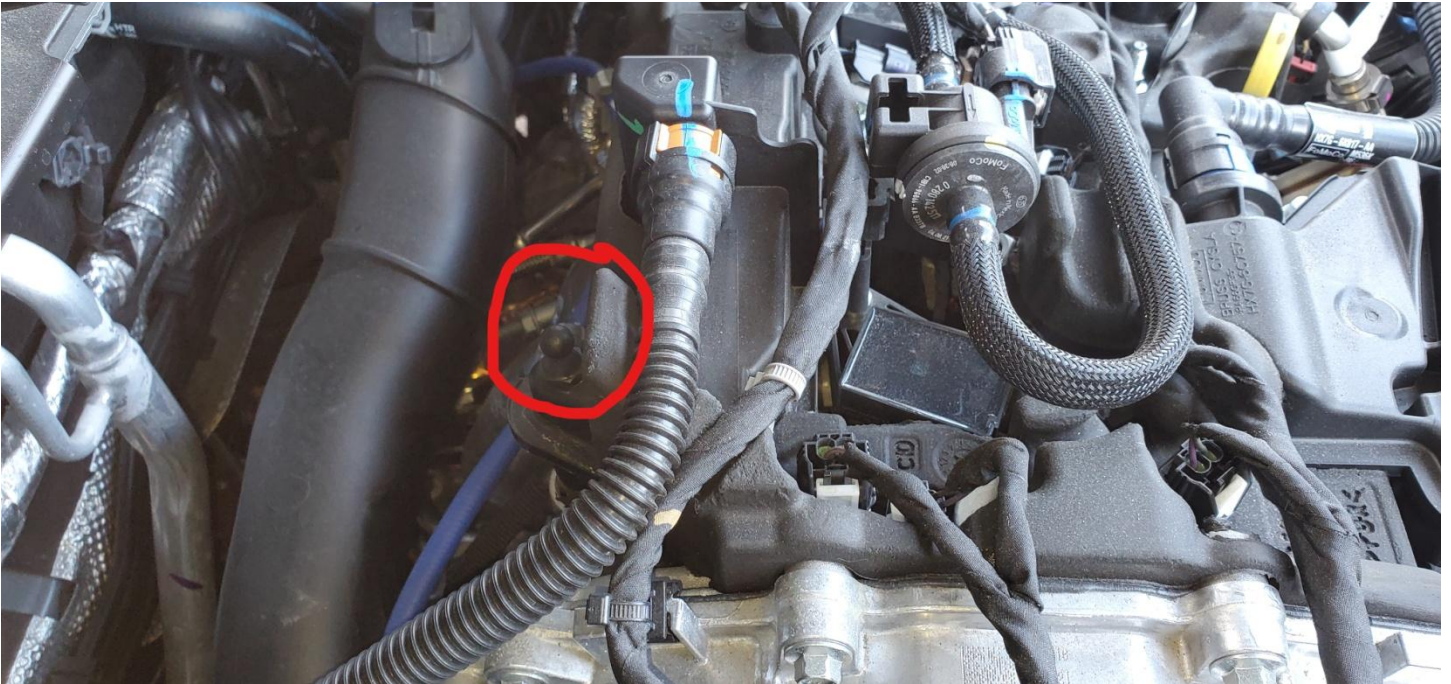

Alright this is where it gets a little tricky. The bracket circled in red (Top right of Engine) only purpose is to hold the wire tubes that are zip tied to it. This bracket has to be removed due to interfering with the engine cover's next ball stud which is under this bracket.

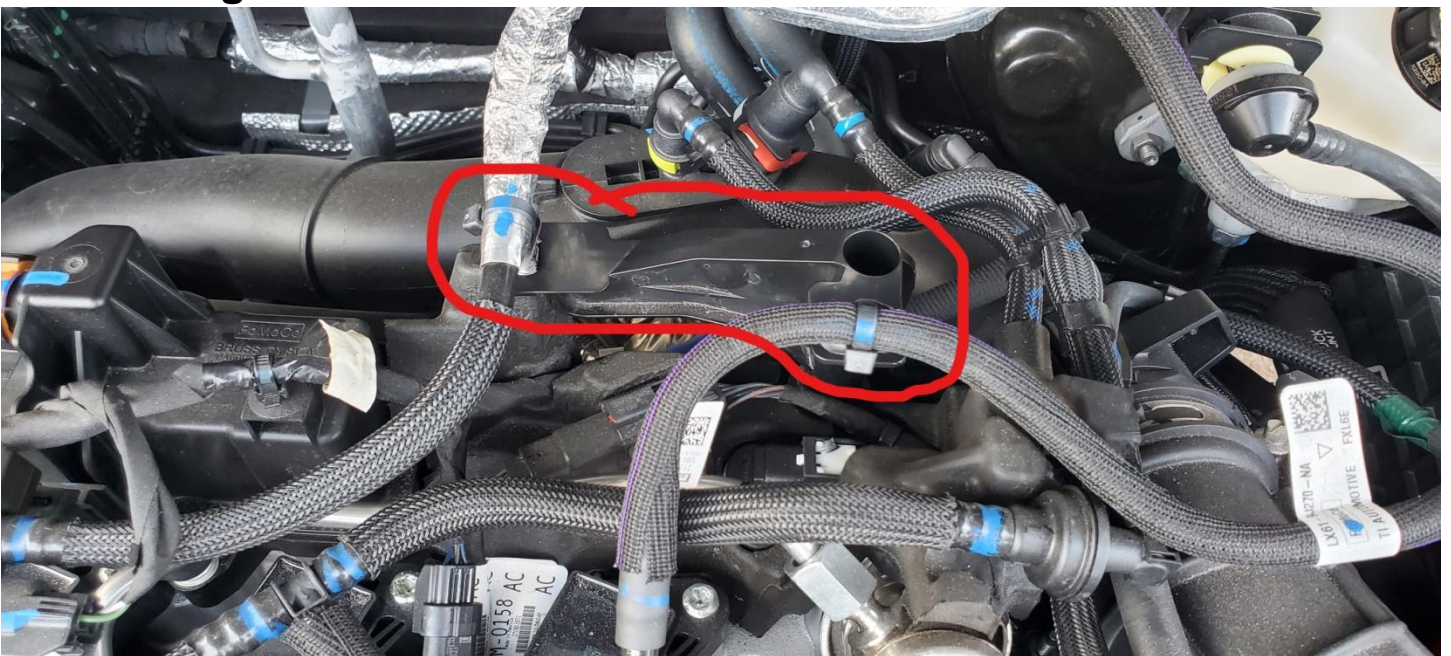

This bracket is removed by first cutting the zip tie off the tubes (careful not to snip the tube). Then moving the tubes a little to the side out the brackets way, grab the bracket underneath by the circle opening and pull straight up with a little force. (Do not pull in an angle as you risk breaking/damaging the ball stud needed underneath the bracket).

This is what the bracket looks like once off. Can be stored in a Safe place in case ever needed.



Once the bracket is removed your third ball stud is revealed.



Once the first two ball studs (AA5Z 6N958-A) are installed and the bracket has been removed the engine cover (JX6Z-6A949-B) is ready to be installed. Align the engine cover on the engine accordingly with the ball studs and gently push in all 3 points until you feel them snap in. It is recommended to start with the ball stud which was revealed when the bracket is removed which will make the other two ball studs easier to align. Once all 3 points are pressed in the engine cover holds the two tubes that the bracket did hold (The one removed) in place and your installation is complete which

Looks great!!!

